

Product Description

1. API 682 Category 1, Type A, Arrangement 1
2. Dual seal configuration
3. Balanced design
4. Independent of direction of rotation
5. Cartridge construction
6. Robust construction with solid seal face
7. Heavy duty solid seat design

Technical Features

1. Designed to accommodate shaft deflections and process fluctuations
2. Efficient construction for heat dissipation
3. Compact installation design
4. Factory assembled cartridge unit for easy installation
5. Springs are product protected to avoid contamination
6. Can accommodate reverse pressure
7. Can handle extensive applications in various temperatures and pressures
8. Versatile in design to fit various seal chambers

Industrial Application

- Chemical industry
- Petrochemical industry
- Oil and gas industry
- Highly volatile hydrocarbons
- Toxic and hazardous media
- Media with poor lubrication properties
- Low solids content and low abrasive media
- Vertical and horizontal ANSI chemical standard pumps

Operating Limits

Shaft diameter: d1 = 20 ... 110 mm
Pressure: p1 = 22 bar
Temperature: t = -40 °C ... +176 °C
Sliding velocity: vg = 23 m/s

Note : Other Sizes On Request

Material Of Construction

Seal ring: Blister resistant carbon, Silicon carbide SSiC
Mating ring: Silicon carbide SSiC
Secondary seals: EPDM, NBR , FKM , FFKM
Springs: Hast'c, Alloy276
Metal parts: CrNiMo steel 316


Note : Other MOC Combinations On Request

Recommended Piping plans-2CW-CW

Process side: 01, 02, 03, 11, 12, 13, 14, 21, 22, 23, 31, 41, 32
Between seals: 52, 55
Atmospheric side*: 61, 62, 65A, 65B
 * Depending on application, please enquire

Recommended Piping plans -3CW-FB

Process side: 01, 02, 03, 11, 12, 13, 14, 21, 22, 23, 31, 41, 32
Between seals: 53A, 53B, 53C, 54
Atmospheric side*: 61, 62, 65A, 65B
 * Depending on application, please enquire

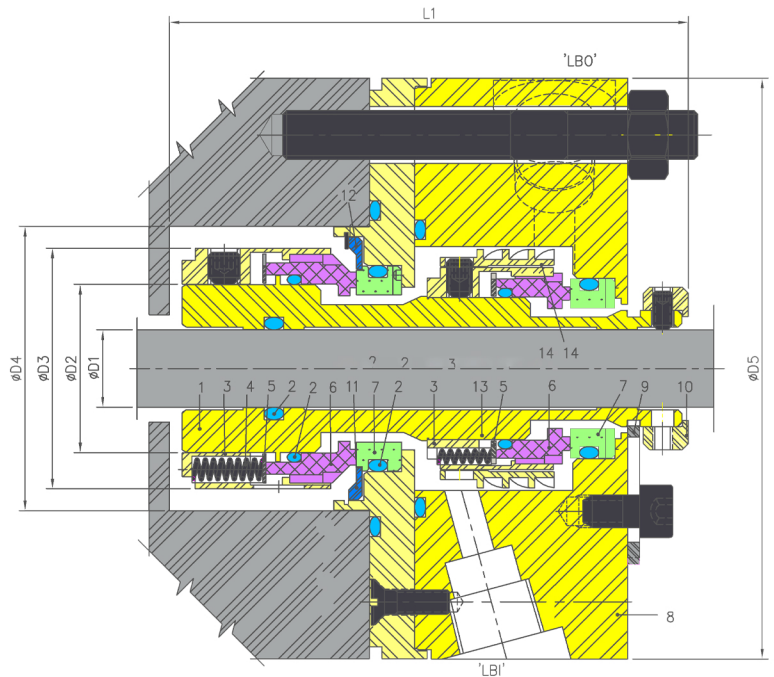

Item	Description
1	Sleeve
2	O- Ring
3	Cup
4,	Spring
5	Thurst Washer
6	Seal ring(Ib&Ob)
7	Mr(Ib&Ob)
8	Gland
9	Setting Plate
10	Drive Collar
11	Retaining rine
12	Circlip
13	Stub Sleeve
14	Pumping Screw